


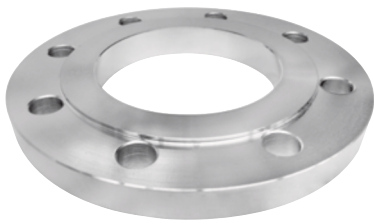


DIN PN10




DN	D	d _i	h	HOLES			Weight Kg
				a	f	NUMBER OF HOLES	
200	340	221,5	24	295	22	8	10,30
250	395	276,5	26	350	22	12	14,00
300	445	327,5	26	400	22	12	15,50
350	505	359,5	30	460	22	16	23,00
400	565	411,0	32	515	26	16	29,00
450	615	462,0	36	565	26	20	35,00
500	670	513,5	38	620	26	20	42,00
600	780	616,5	42	725	30	20	54,00
700	895	-	-	840	30	24	66,00
800	1.015	-	-	950	33	24	90,00
900	1.115	-	-	1.050	33	28	103,00
1.000	1.230	-	-	1.160	36	28	131,00

DIN PN16

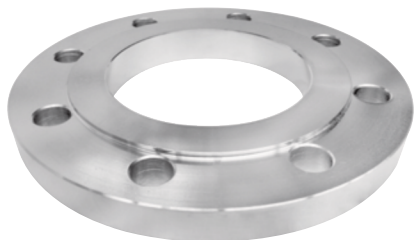

DN	D	d ₁	h	HOLES			Weight Kg
				a	f	NUMBER OF HOLES	
65	185	77,5	20	145	18	8(4)*	3,10
80	200	90,5	20	160	18	8	3,80
100	220	116,0	22	180	18	8	4,80
125	250	141,5	22	210	18	8	6,40
150	285	170,5	24	240	22	8	8,00
200	340	221,5	26	295	22	12	10,30
250	405	276,5	29	355	26	12	17,50
300	460	327,5	32	410	26	12	20,00
350	520	359,5	35	470	26	16	30,50
400	580	411,0	38	525	30	16	37,50
450	640	462,0	42	585	30	20	43,00
500	715	513,5	46	650	33	20	52,00
600	840	616,5	55	770	36	20	72,00
700	910	-	63	840	36	24	90,00
800	1.025	-	74	950	39	24	117,00
900	1.125	-	82	1.050	39	28	130,00
1.000	1.255	-	90	1.170	42	28	165,00

DIN PN 40



DN	D	d _i	h	HOLES			Weight Kg
				a	f	NUMBER OF HOLES	
15	95	22,0	14	65	14	4	0,68
20	105	27,5	16	75	14	4	0,95
25	115	34,5	16	85	14	4	1,14
32	140	43,5	18	100	18	4	1,87
40	150	49,5	18	110	18	4	2,13
50	165	61,5	20	125	18	4	2,78
65	185	77,5	22	145	18	8	3,80
80	200	90,5	24	160	18	8	4,70
100	235	116,0	26	190	22	8	6,33
125	270	141,5	28	220	26	8	8,53
150	300	170,5	30	250	26	8	10,90
200	375	221,5	36	320	30	12	18,00
250	450	276,5	42	385	33	12	31,80
300	515	327,5	52	450	33	16	41,90
350	580	359,5	58	510	36	16	64,40
400	660	411,0	65	585	39	16	90,30